


SPECIFICATIONS

- MATERIAL/FEATURES**
 - Cast Aluminum or Cast Brass options available
 - Heat Resistant Glass Lens (Convex x101 & x102 only)
 - Includes (GS1) ABS Ground Stake
 - EPDM Rubber Bug Plug, prevents moisture/bugs from entering fixture
 - Thumb Screw on knuckle for easy field adjustment
 - Double "O" Ring Seal for added moisture protection
- FINISH**
 - Weather Resistant Powder Coat Finish - Aluminum
 - Weather Resistant Chemical Finish - Brass
 - Brass finishes will vary over time, and are warranted not to corrode
- ELECTRICAL**
 - 3' - #18/2 Direct Bury Landscape Lighting Wire
 - Optional - 25' - #16/2 Direct Bury Landscape Lighting Wire
- LAMP**
 - Hi-temp ceramic socket w/stainless steel spring
 - Includes 12 Volt MR16 20 watt HALOGEN Bi-pin Bulb
 - Max Wattage DS1102 - 50w, DS1101 - 35w & DS1102 - 20w
 - Max Wattage DS2102 - 50w
- LED - OPTIONAL**
 - 5 Watt Warm white high powered LED
 - 5 Watt cool white high powered LED
 - LED operating range 10v - 22v
- DIMENSIONS**
 - 7 1/2" L x 2 1/3" DIA
- MODELS**
 - Aluminum

DS1102AB	DS1102AS	DS1102AZ
----------	----------	----------
 - Brass

DS2102WB	DS2102CF
----------	----------
- OPTIONS**
 - LED - add -5LED to end of model #DS1102AZ-5LEDWW
 - 25' 16/2 Wire Leads add -25 to end of model #DS2102WB-25
- APPLICATIONS**
 - Grazing Down lighting
 - Moonlighting Up lighting
 - Backlighting Use longer shrouds to restrict light glare
 - Suggested when maximum glare shielding is desired.

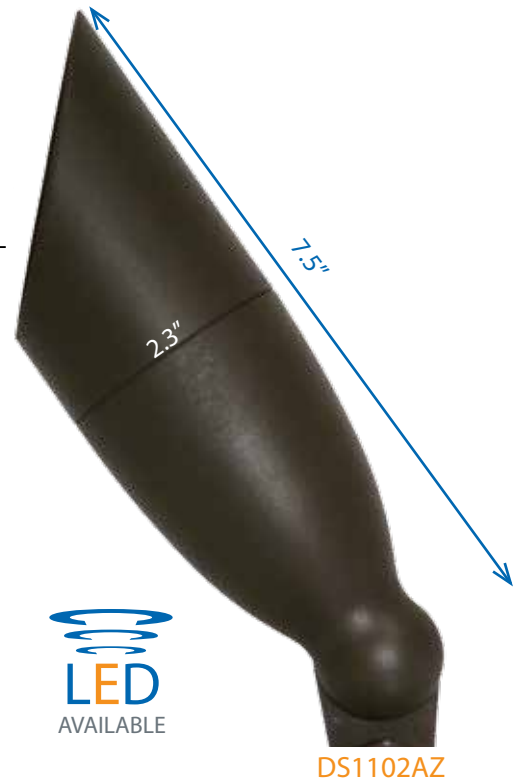



LED
AVAILABLE

DS2900WB



DS2905WB



DS2910WB



SPECIFICATIONS

- **MATERIAL/FEATURES**
 - Cast Aluminum or Cast Brass options available
 - Heat Resistant Glass Lens (Convex DSx900xx only)
 - Includes (GS1) ABS Ground Stake
 - EPDM Rubber Bug Plug, prevents moisture/bugs from entering fixture
 - Thumb Screw on knuckle for easy field adjustment
- **FINISH**
 - Weather Resistant Powder Coat Finish - Aluminum
 - Weather Resistant Chemical Finish - Brass
 - Brass finishes will vary over time, and are warranted not to corrode
- **ELECTRICAL**
 - 3' - #18/2 Direct Bury Landscape Lighting Wire
 - Optional - 25' - #16/2 Direct Bury Landscape Lighting Wire
- **LAMP**
 - Hi-temp ceramic socket w/stainless steel spring
 - 12 volt HALOGEN Bi-Pin Bulbs included
 - DS2900xx - MR16 20 watt BAB - 50 watt max
 - DS2905WB - MR11 20 watt FTD - 35 watt max
 - DS2910WB - MR8 20 watt CMP - 20 watt max
- **LED - OPTIONAL (DS2900xx only)**
 - 5 Watt warm white high powered LED
 - 5 Watt cool white high powered LED
 - LED operating range 10v - 22v
- **DIMENSIONS**
 - DS2900xx - 5 1/4" L x 2 3/8" DIA
 - DS2905WB - 3 3/4" L x 1 3/16" DIA
 - DS2910WB - 3" L x 1 1/2" DIA
- **MODELS**
 - Aluminum
 - DS1900AZ
 - Brass

DS2900WB	DS2905WB	DS2910WB
DS2900CF	DS2905CF	DS2910CF
- **OPTIONS**
 - LED - add -5LED to end of model #DS2900WB-5LEDWW
 - 25' 16/2 Wire Leads add -25 to end of model #DS2900WB-25
- **APPLICATIONS**
 - Grazing Down lighting
 - Moonlighting Up lighting
 - Backlighting Use longer shrouds to restrict light glare
 - DS2900 - Suggested in extreme caustic environments, where maximum flexibility is desired
 - DS2905WB - Suggested when fixture obscurity is desired
 - DS2910WB - Suggested when maximum fixture obscurity is desired

SPECIFICATIONS

- **MATERIAL/FEATURES**
 - Cast Brass
 - Heat Resistant Glass Lens
 - Includes (GS1) ABS Ground Stake
 - EPDM Rubber Bug Plug, prevents moisture/bugs from entering fixture
 - Thumb Screw on knuckle for easy field adjustment
- **FINISH**
 - Weather Resistant Chemical Finish - Brass
 - Brass finishes will vary over time, and are warranted not to corrode
- **ELECTRICAL**
 - 3' - #18/2 Direct Bury Landscape Lighting Wire
 - Optional - 25' - #16/2 Direct Bury Landscape Lighting Wire
- **LAMP**
 - Hi-temp ceramic socket w/stainless steel spring
 - Includes 12 volt MR16 50 watt EXN
 - Maximum 75 watt MR16
- **LED - OPTIONAL**
 - 5 Watt warm white high powered LED
 - 5 Watt cool white high powered LED
 - LED operating range 10v - 22v
- **DIMENSIONS**
 - 8" L x 3" DIA
- **MODELS**
 - Brass
- **OPTIONS**
 - LED - add -5LED to end of model #DS2950WB-5LEDWW
 - 25' 16/2 Wire Leads add -25 to end of model #DS2950WB-25
- **APPLICATIONS**
 - Grazing Down lighting
 - Moonlighting Up lighting
 - Backlighting Use longer shrouds to restrict light glare
 - Suggested where up to 75 watts bulbs are necessary



DS2950WB

