

SLB8100BK Installation instructions

SAVE THESE INSTRUCTIONS

WARNING – TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:


- Turn power OFF or unplug fixture and allow it to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or fixture housing until it has cooled.
- Keep lamp away from combustibles.
- Do not touch lamp if using a halogen lamp. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the fixture fitting with a missing or damaged shield.

IMPORTANT SAFETY INSTRUCTIONS

- For outdoor use only.
- Make sure the power is turned OFF before installing or servicing this fixture.
- **WARNING:** Risk of electrical shock. This fixture may not be installed into pool, spa, or fountain.
- This fixture is to be used with a low voltage power supply that does not exceed 15V.
- Position the wire and wire connector so that is connected away from a building structure,
- The fixture wiring should be buried at a depth of six inches or less to ensure connectivity to the main supply cable.

LAMP INSTALLATION/REPLACEMENT INSTRUCTIONS

- 1) Loosen the four housing plate screws with Philips screwdriver and remove the housing plate from the fixture housing.
- 2) Insert a MR16 lamp (50W max) into the lamp socket.
- 3) Replace housing plate and secure with the four included housing plate screws to the fixture housing.

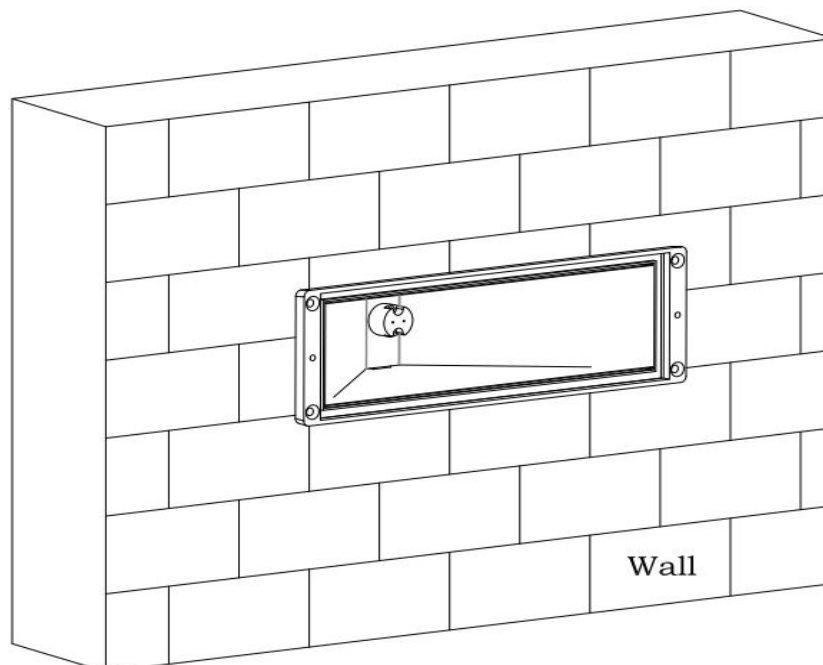

SLB 8100BK Installation Instructions

FIXTURE MOUNTING INSTRUCTIONS

- 1) Cut out adequate size hole in wood or concrete for SLB to fit inside hole.
- 2) Place the housing on the desired mounting location and mark hole locations for the fixture mounting screws.
- 3) Drill pilot holes in the four positions for the mounting screws.
- 4) Disconnect transformer from primary 120v power.
- 5) Feed main line to fixtures.
- 6) Strip the two fixture wires.
- 7) Attach the two fixture wires to the two main supply cable leads using waterproof connectors.
- 8) Connection to main should be at least 5 feet from water source to prevent shortage.
- 9) Place the housing on the mounting location and secure with four wood screws or concrete anchors.
- 10) Insert a MR16 lamp (50W max) into the lamp socket.
- 11) Attach Step light cover (sold separately) and secure with the two included screws to the box housing.
- 12) Reconnect the transformer to the primary 120v power.