

UP1112-UP1118, UP2112-UP2118 Series Installation Instructions

SAVE THESE INSTRUCTIONS

WARNING – TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:


- Turn power OFF or unplug luminaire and allow it to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or luminaire housing until it has cooled.
- Keep lamp away from combustibles.
- Do not touch lamp. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.

IMPORTANT SAFETY INSTRUCTIONS

- For outdoor use only.
- Make sure the power is turned OFF before installing or servicing this luminaire.
- **WARNING:** Risk of electrical shock. Install all luminaires 10 feet (3.05 m) or more from a pool, spa, or fountain.
- Position the wire and wire connector so that is connected within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
- Not to be buried except for a maximum of 6 inches to connect to the main low voltage cable.


FIXTURE MOUNTING INSTRUCTIONS

- 1) Disconnect transformer from main power supply.
- 2) Insert T3 bi-pin lamp with correct wattage as marked on fixture label into socket located at top of Up Post.

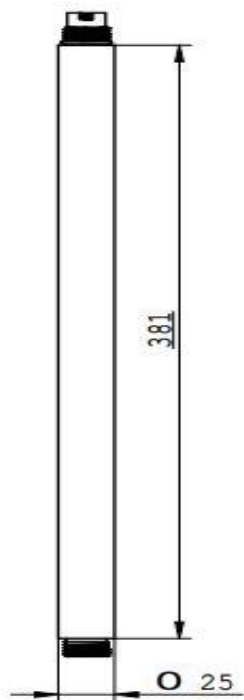

UP1112-UP1118, UP2112-UP2118 Series Installation Instructions

- 3) Attach the bottom of the Shade lens assembly to the Up post.
- 4) Run pigtail wire from fixture through the ground stake mounting hole

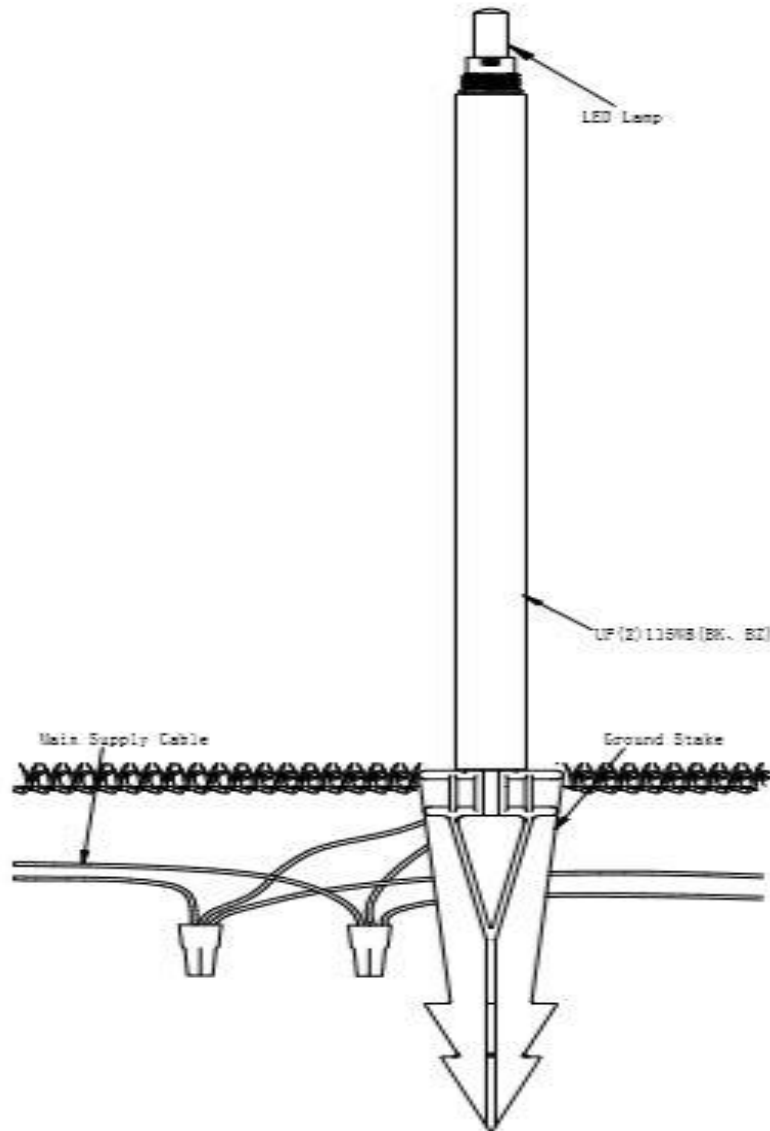

- 5) Insert composite ground stake in desired location until flange of stake is flush to grade.
- 6) Screw Up Post into top of stake and tighten until snug
- 7) Strip the two fixture pigtail wires and connect them to the main low voltage supply cable lead with wire connectors

LAMP INSTALLATION/REPLACEMENT INSTRUCTIONS

- 1) Unscrew Shade lens assembly from Up post.
- 2) Insert T3 bi-pin lamp with correct wattage as marked on fixture label.
- 3) Attach the bottom of the Shade lens assembly to the stem.