

## LED - LV Bi Pin Series

## LV1-T3, LV2-T3, LV3-T3

## SPECIFICATIONS

- Silica Gel Lamps
- G4 Socket Base –
- 80+ CRI
- 25,000 Hour rated
- UV Infused Inhibitors
- LED's are measured and tested @ 12 Volts
  - Longest Life occurs at 12 Volts
- Stainless Steel Pins
- Silver Soldering for Long Lasting Performance
- Made for use in Enclosed Fixtures and Damp Location
- 2700K and 3000K Color Temperature
- LV1-T3
  - 120 Lumens, 1.5 Watts, .13 VA, .7 PF
- LV2-T3
  - 180 Lumens, 2.5 Watts, .17 VA, .7 PF
- LV3-T3
  - 260 Lumens, 3.5 Watts, .21 VA, .7 PF
- IP Rating 65

## ELECTRICAL

- 9-15 V AC/DC
- Constant Current Driver for Long Life
- Dimmable with Lutron Magnetic Dimmers
  - Dimming may Reduce Life Span
- Enclosed Fixture Required (Not Included)
- Low Voltage Transformer or Electronic Transformer Required (Not included)
- C ETL Listed and Approved
- FCC Certified

## MODELS

- LV1-T3-27K or LV1-T3-30K
- LV2-T3-27K or LV2-T3-30K
- LV3-T3-27K or LV3-T3-30K

## DIMENSIONS


- LV1 .35" W x 1" H
- LV2 .5" W x 1.10" H
- LV3 .6" W x 1.25" H



LV1-T3



LV2-T3

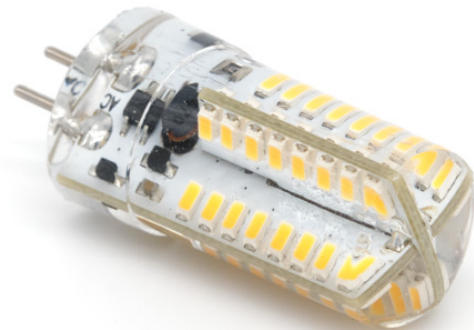

LV3-T3

