



LXC-MR16

LED - LXC-MR16

MATERIAL	MODEL NUMBER	LUMENS	KELVIN
Machined aluminum body	LXC2-MR16-NS-22K	250 Lumens	2200K
Machined aluminum body	LXC2-MR16-NS-27K	250 Lumens	2700K
Machined aluminum body	LXC2-MR16-NS-30K	250 Lumens	3000K
Machined aluminum body	LXC2-MR16-FL-22K	250 Lumens	2200K
Machined aluminum body	LXC2-MR16-FL-27K	250 Lumens	2700K
Machined aluminum body	LXC2-MR16-FL-30K	250 Lumens	3000K
Machined aluminum body	LXC2-MR16-WF-27K	250 Lumens	2700K
Machined aluminum body	LXC2-MR16-WF-30K	250 Lumens	3000K
Machined aluminum body	LXC3-MR16-NS-22K	400 Lumens	2200K
Machined aluminum body	LXC3-MR16-NS-27K	400 Lumens	2700K
Machined aluminum body	LXC3-MR16-NS-30K	400 Lumens	3000K
Machined aluminum body	LXC3-MR16-FL-22K	400 Lumens	2200K
Machined aluminum body	LXC3-MR16-FL-27K	400 Lumens	2700K
Machined aluminum body	LXC3-MR16-FL-30K	350 Lumens	3000K
Machined aluminum body	LXC3-MR16-WF-27K	400 Lumens	2700K
Machined aluminum body	LXC3-MR16-WF-30K	400 Lumens	3000K
Machined aluminum body	LXC5-MR16-NS-27K	550 Lumens	2700K
Machined aluminum body	LXC5-MR16-NS-30K	550 Lumens	3000K
Machined aluminum body	LXC5-MR16-FL-27K	550 Lumens	2700K
Machined aluminum body	LXC5-MR16-FL-30K	550 Lumens	3000K
Machined aluminum body	LXC5-MR16-WF-27K	550 Lumens	2700K
Machined aluminum body	LXC5-MR16-WF-30K	550 Lumens	3000K



LXC-MR16

SPECIFICATIONS:

Material:

- Machined aluminum body

Socket Type:

- GU5.3 base socket

Dimensions:

- LXC Series: 2" W x 1.5" H

Voltage Range:

- 9-15 volts AC/DC

IP Rating:

- IP 54
- Made for use in enclosed fixtures

Electrical:

- LXC2-MR16: 250 Lumens, 3 Watts, .35 VA, .7 PF
- LXC3-MR16: 400 Lumens, 5 Watts, .55 VA, .7 PF
- LXC5-MR16: 550 Lumens, 7 Watts, .70 VA, .7 PF

Rated Hours:


- 40,000

Dimmable:

- Yes with Lutron magnetic dimmers

Certification:

- CETL listed and approved.
- FCC Certified (won't interfere with electronics)

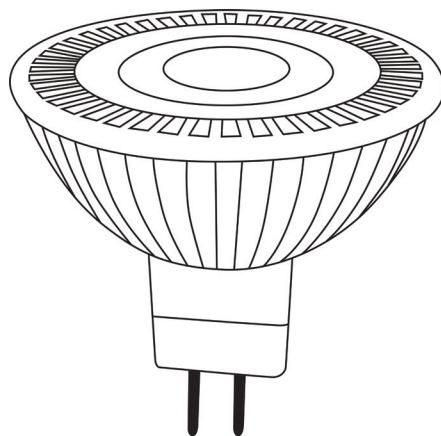

Intertek