

# LED - LV SCB and DCB

## LV2-SCB, LV2-DCB

### SPECIFICATIONS

- Silica gel lamps
- BA15S base single contact options
- 80+ CRI
- 25,000 hour rated
- UV infused inhibitors
- LED's are measured and tested at 12 Volts
  - Longest life occurs at 12 Volts
- Stainless steel base
- Silver soldering for long lasting performance
- Made for use in enclosed fixtures and damp location
- 2700K and 3000K color temperature
- LV2-SCB
  - 170 Lumens, 2.5 Watts, .17 VA, .7 PF
- LV2-DCB
  - 170 Lumens, 2.5 Watts, .17 VA, .7 PF
- IP rating 65
- Lamp - 5 year warranty

### ELECTRICAL


- 9-15 V AC/DC
- Constant current driver for long life
- Dimmable with Lutron magnetic dimmers
  - Dimming may reduce life span
- Enclosed fixture required (not included)
- Low voltage transformer or electronic transformer required (not included)
- C ETL listed and approved
- FCC certified

### MODELS


- LV2-SCB-27K
- LV2-SCB-30K
- LV2-DCB-27K
- LV2-DCB-30K

### DIMENSIONS

- LV2-SCB - .7" W x 1.65" H
- LV2-DCB - .7" W x 1.65" H

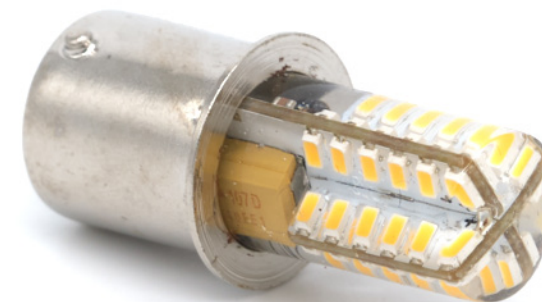

LV2-SCB

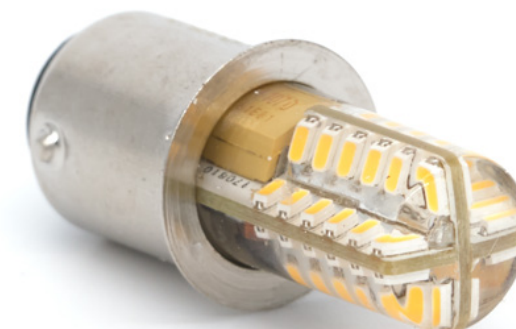

LV2-DCB

