


AF

Area Flood



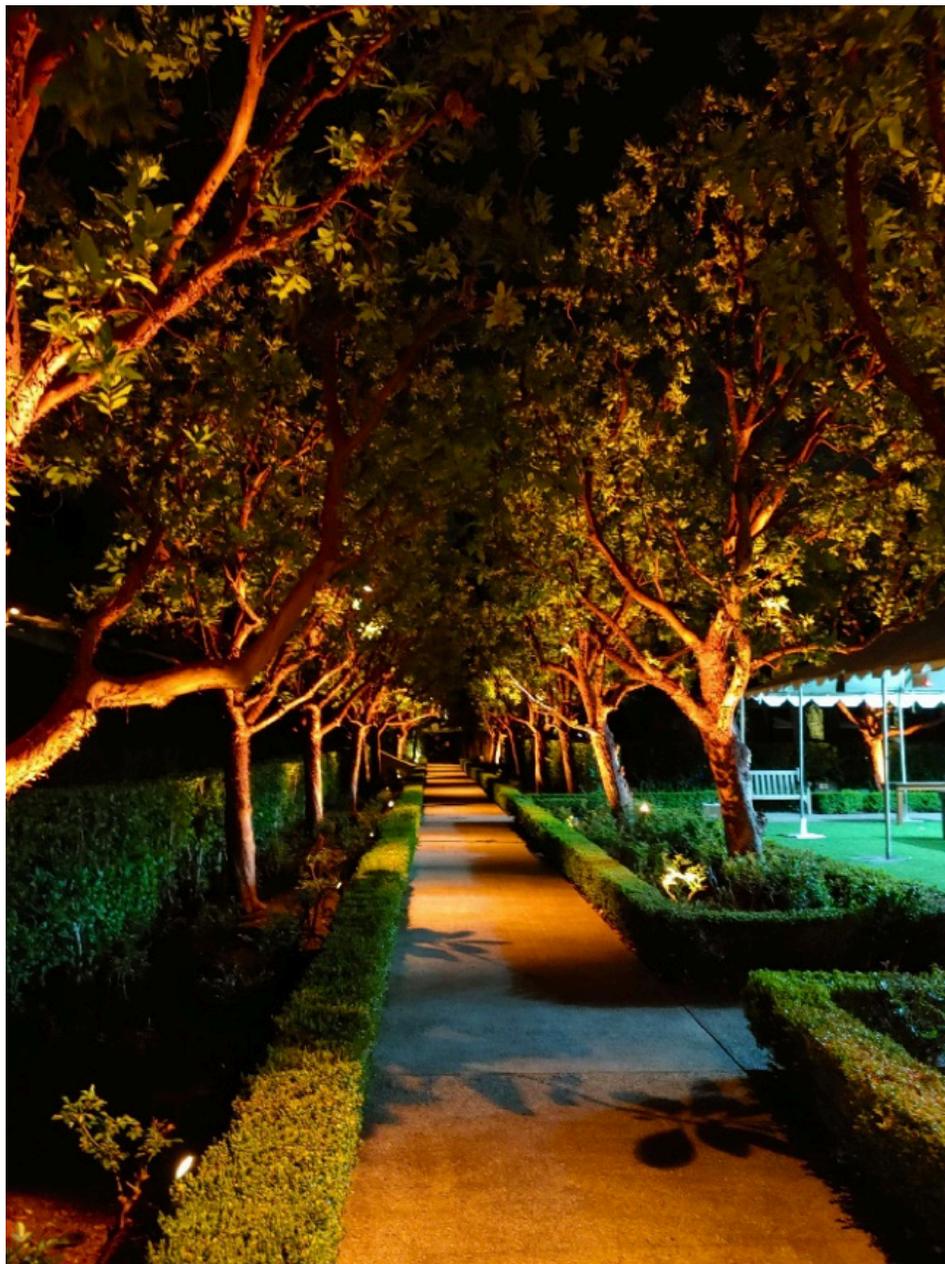

**In nature,
nothing is
perfect, and
everything
is perfect.
Trees can be
contorted,
bent in weird
ways, and
they're still
beautiful.
- Alice
Walker**

Our new 2200K LXC Series MR16 accentuate the beauty of nature, inviting warmth and comfort. The LXC Series MR16 lamps with Chip on Board technology, offer confidence and value. Accompanying them are our new Bi Pin T3 2200K LED lamps. Look for these lamps in the fall of 2023.

Area Flood

AF2160WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Shock and heat resistant flat clear and frosted glass lens
- Includes (GS1) ABS ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- Thumb screw on knuckle for easy field adjustment
- EPDM gasket seal for added moisture protection
- (WB) Weathered Brass – AF2160WB
 - WB Brass finish will patina / tarnish depending on environmental Conditions
- (CB) Carbon Black – AF2160CB
 - Superior Dupont polyester powder coating
 - Lifetime Warranty
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Lamp required - T3 35 W Max
- Low voltage transformer required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 3.30" W x 4.17" H x 21.46" D



AF2160WB



AF2160CB



LV1-T3



LV2-T3



LV3-T3

Area Flood

AF2160WB/CB-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF2160WB-LV2T3 includes:
 - AF2160WB cast brass WB small area flood
 - (GS1) ABS ground stake
 - LV2-T3-27K lamp
- The AF2160CB-LV2T3 includes:
 - AF2160CB cast brass CB small area flood
 - (GS1) ABS ground stake
 - LV2-T3-27K lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty
- LED Lamp - 5 year warranty

LED LAMP INCLUDED


- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 5" L x 4.375" W x 2" H across the front shroud



AF2160WB



LV2-T3

Area Flood

AF2900WB

MATERIAL / FEATURES

- Heavy duty cast brass
- Shock and heat resistant flat clear and frosted glass lens
- Includes (GS1) ABS ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- Key screw on knuckle for easy field adjustment
- Double O-ring seal for added moisture protection
- Weather resistant aged finish - Brass
- (WB) Weathered Brass - AF2900WB
 - WB Brass finish will patina / tarnish depending on environmental conditions
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Lamp required - T3 35 W Max
- Low voltage transformer required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 5" L x 4.375" W x 2" H across the front shroud



AF2900WB



LV1-T3



LV2-T3



LV3-T3

Area Flood

AF2900WB-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF2900WB-LV2T3 includes:
 - AF2900WB cast brass WB small area flood
 - (GS1) ABS ground stake
 - LV2-T3-27K lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty
- LED Lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 5" L x 4.375" W x 2" H across the front shroud



AF2900WB



Intertek



LV2-T3

Area Flood

AF1300BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Optional cowling thumb set screw - allowing downlight use
- Shock and heat resistant convex glass lens
- Includes (GS1) ABS ground stake, 1/2" NPT thread, slotted for ease of installation
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- Thumb screw on knuckle for easy field adjustment
- Double O ring seal for added moisture protection
- Weather resistant powder coat finish - aluminum
 - (BK) Black - DS1300BK
 - (BZ) Bronze - DS1300BZ
- Includes two AC-102 silicone filled wire connectors
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Lamp required - MR16 50 W Max
- Low voltage transformer required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LXC2-MR16 lamps
- LXC3-MR16 lamps
- LXC5-MR16 lamps
- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6.25" L x 2.5" W across the front shroud



AF1300BK



AF1300BZ



LV1-T3



LV2-T3



LV3-T3



LXC2-MR16



LXC3-MR16



LXC5-MR16

Area Flood

AF1300BK/BZ-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF1300BK-LV2T3 and AF1300BZ-LV2T3 include:
 - Cast aluminum powder coated large area flood
 - (GS1) ABS ground stake
 - LV2-T3-27K LED lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6.25" L x 2.5" W across the front shroud



AF1300BK



AF1300BZ



LV2-T3

Area Flood

AF1300BK/BZ-LXC2

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF1300BK-LXC2 and AF1300BZ-LXC2 include:
 - Cast aluminum powder coated large area flood
 - (GS1) ABS ground stake
 - LXC2-MR16-FL-27K LED lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - 10 year warranty
- LED lamp - 7 year warranty

LED LAMP INCLUDED

- LXC2-MR16-FL-27K
- 9-15 V AC/DC
- Constant current driver for long life
- FCC certified
- C ETL listed and approved
- 40 degree flood
- 2700K
- 250 Lumens
- COB technology

DIMENSIONS


- 6.25" L x 2.5" W across the front shroud



AF1300BK



AF1300BZ



LXC2-MR16

Area Flood

AF2300WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Shock and heat resistant flat clear and frosted glass lens
- Includes (GS1) ABS ground stake, 1/2" NPT thread, slotted for installation
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- Thumb screw on knuckle for easy field adjustment
- Double O-ring seal for added moisture protection
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Lamp required - two options:
 - MR16 50 W Max
 - T3 35 W Max
- Low voltage transformer required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LXC2-MR16 lamps
- LXC3-MR16 lamps
- LXC5-MR16 lamps
- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6.75 L x 4" W x 3" H across the front shroud



AF2300WB



AF2300CB



LV1-T3



LV2-T3



LV3-T3



LXC2-MR16



LXC3-MR16



LXC5-MR16

Area Flood

AF2300WB-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF2300WB-LV2T3 includes:
 - AF2300WB cast brass WB large area flood
 - (GS1) ABS ground stake
 - LV2-T3-27K lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6.75 L x 4" W x 3" H across the front shroud



AF2300WB



Intertek



LV2-T3

Area Flood

AF2300WB-LXC2

KITTED FIXTURE

PRODUCT DESCRIPTION

- The AF2300WB-LXC2 includes:
 - AF2300WB cast brass WB large area flood
 - (GS1) ABS ground stake
 - LXC2-MR16-FL-27K LED lamp
- Includes two AC-102 silicone filled wire connectors
- Fixture - lifetime warranty
- LED lamp - 7 year warranty

LED LAMP INCLUDED


- LXC2-MR16-FL-27K
- 9-15 V AC/DC
- Constant current driver for long life
- FCC certified
- C ETL listed and approved
- 40 degree flood
- 2700K
- 250 Lumens
- COB technology

DIMENSIONS

- 6.75 L x 4" W x 3" H across the front shroud



AF2300WB



LXC2-MR16

Integrated LED Mini Flood

ILED-AF4407BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Includes (GS-mini) ABS ground stake, 1/2" NPT thread, slotted for ease of installation
- 270° adjustable rotating mount
- Weather resistant powder coat finish - aluminum
 - (BZ) Bronze - AF4407BZ
- Includes two AC-102 silicone filled wire connectors
- Fixture - 10 year warranty

ELECTRICAL

- Input 9-15 volts
- 10' - #18/2 direct bury landscape lighting wire
- Integrated LED's - no lamp required
- LED diodes have 90° beam spread
- Low voltage transformer required (not included)
- C ETL listed and approved
- FCC certified

LED - LIGHTING MODULE

- Integrated LED - no lamp required
- 100 Lumens, 1.25 Watts, 2 VA, .62 PF
- 2700K Kelvin temperature

DIMENSIONS

- LED light bar - 7" W x .75" H x .5" D
- Post - 5.75" H x .33" W
- Mini ground stake - 7" H x 1" W (GS-mini)



Intertek



ILED-AF4407BZ