


CP

Contemporary Path

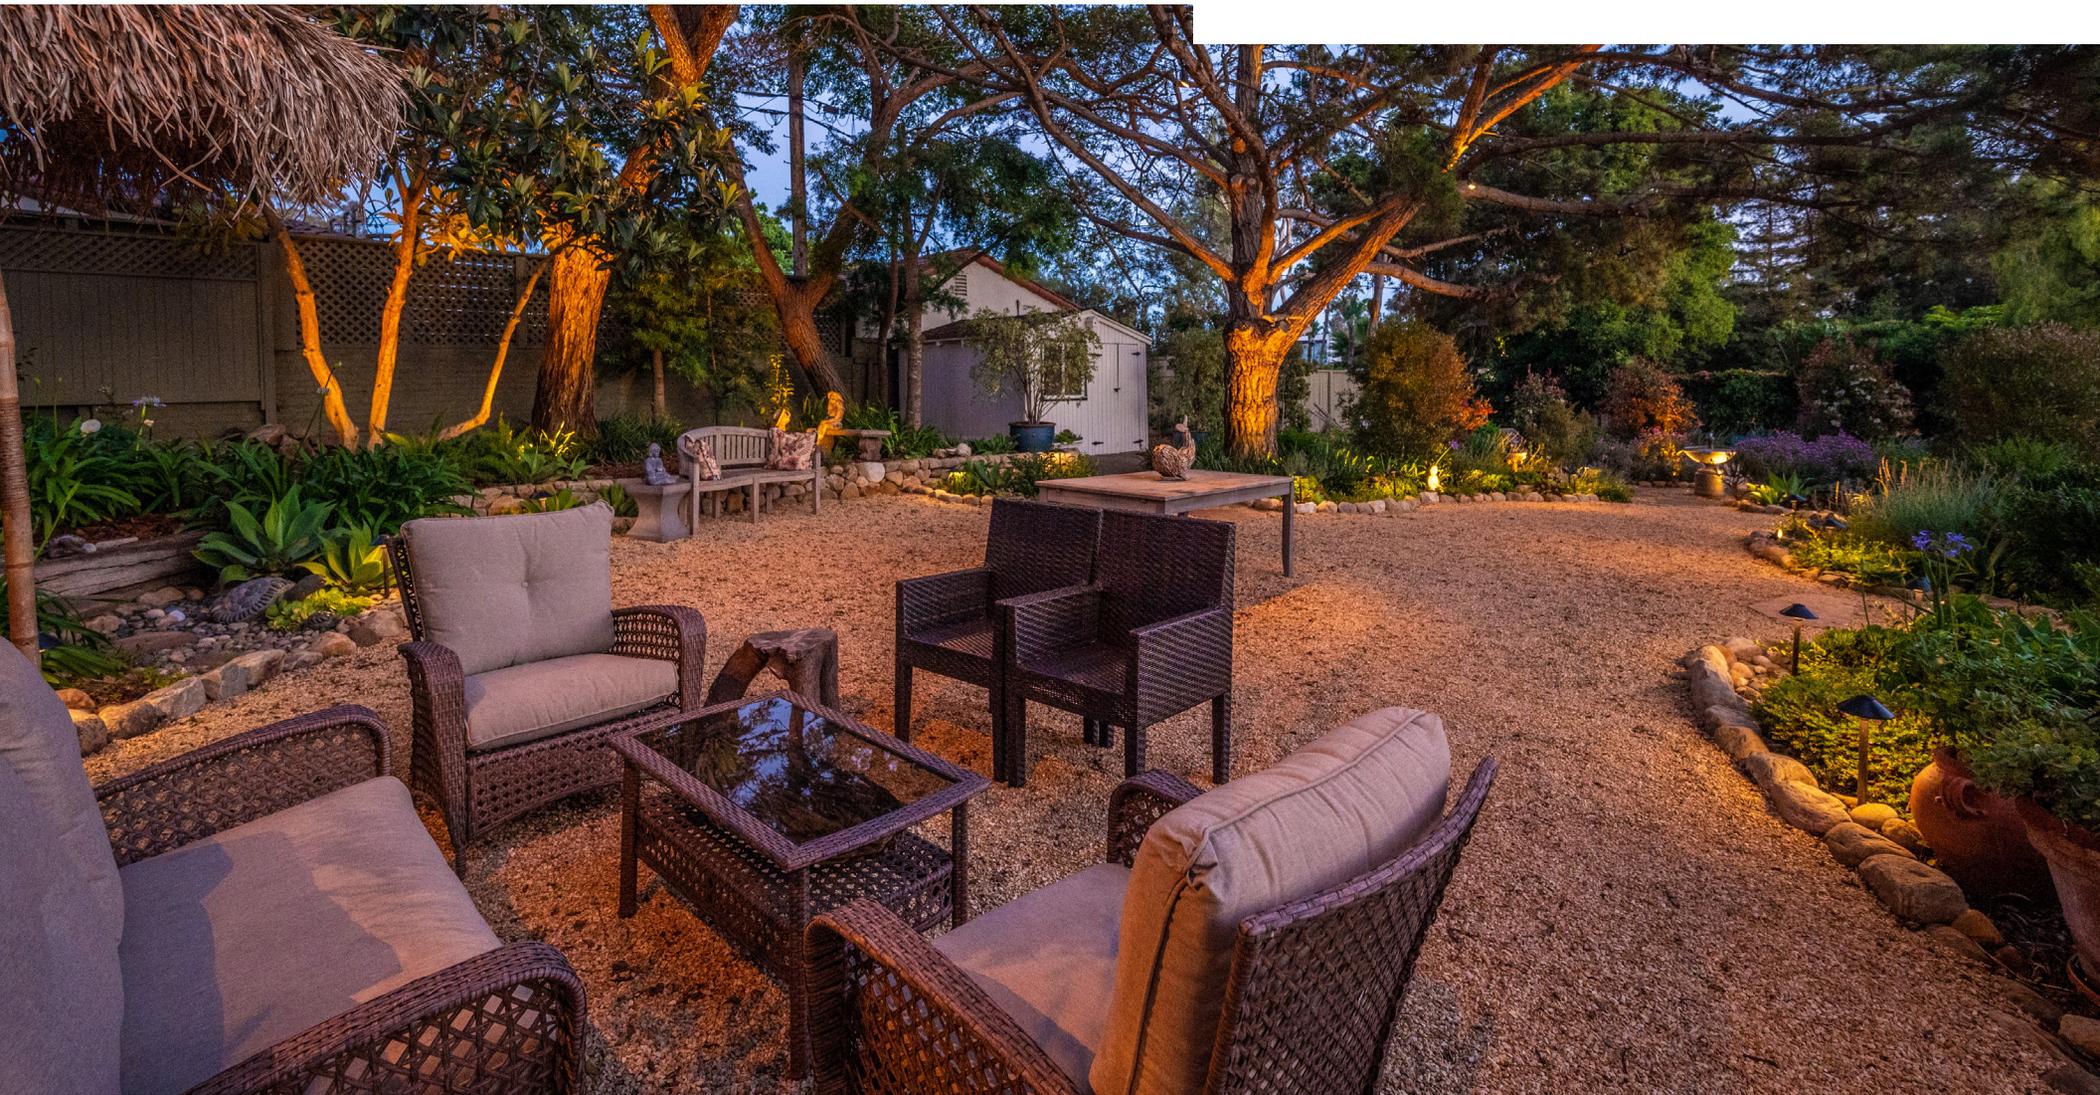

Contemporary Path

PL1100BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Uni-body laser welded for long life
- Clear lamp compartment cover
- Includes polished aluminum reflector
- Weather resistant powder coat finish - aluminum
 - (BK) Black - PL1100BK
 - (BZ) Bronze - PL1100BZ
- Lamp required (not included - see options)
- (GS3) ABS ground stake
- Fixture – 10-year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Includes wire connectors
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 1"W x 21"H x 6"D



PL1100BK



PL1100BZ



Intertek



LV1-T3



LV2-T3



LV3-T3

Contemporary Path

PL1100BK/BZ-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION


- The PL1100BK/BZ-LV2T3 includes:
- Weather resistant powder coat finish - aluminum
 - (BK) Black - PL1100BK
 - (BZ) Bronze - PL1100BZ
- LV2-T3 LED lamp
- (GS3) ABS ground stake
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 1"W x 21"H x 6"D

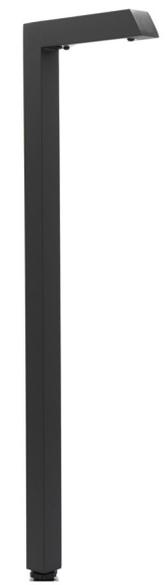

PL1100BK



LV2-T3-27K

Contemporary Path

PL2100WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Uni-body laser welded for long life
- Clear lamp compartment cover
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Lamp required (not included - see options)
- (GS3) ABS ground stake
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Includes wire connectors
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 1"W x 21"H x 6"D



PL2100WB



PL2100CB



Intertek



LV1-T3



LV2-T3



LV3-T3

Contemporary Path

PL2100WB-LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION


- The PL2100WB-LV2T3 includes:
 - (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
 - LV2-T3 LED lamp
 - (GS3) ABS ground stake
 - Fixture - lifetime warranty
 - LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 1"W x 21"H x 6"D

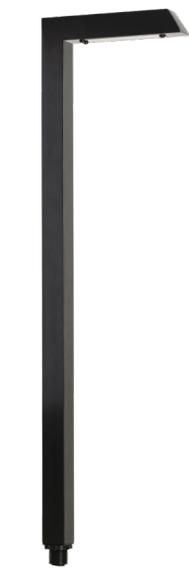

PL2100WB



LV2-T3



Hybrid Integrated Contemporary Path

HI-PL1100BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Uni-body laser welded for long life
- Clear lamp compartment cover
- Includes polished aluminum reflector
- Weather resistant powder coat finish - aluminum
 - (BK) Black - PL1100BK
 - (BZ) Bronze - PL1100BZ
- Lamp required (not included - see options)
- (GS3) ABS ground stake
- Fixture – 10-year warranty
- LED module – 10-year warranty

ELECTRICAL


- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- Low voltage transformer required (not included)
- C ETL listed and approved
- FCC certified

LED - LIGHTING MODULE


- PL6605BZ LED Module
- 150 Lumens ,2Watts, .217VA, .76 PF

DIMENSIONS

- 1"W x 21"H x 6"D

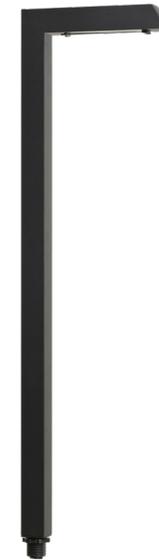

HI-PL1100BK

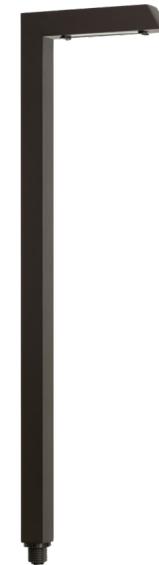

HI-PL1100BZ



PL6605BZ

Hybrid Integrated Contemporary Path

HI-PL2100WB

MATERIAL / FEATURES

- Heavy duty cast brass
- Uni-body laser welded for long life
- Includes replaceable LL6605BZ LED module
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- Includes two AC-102 silicone filled wire connectors
- (GS3) ABS ground stake
- Fixture - lifetime warranty
- LED module - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- Low voltage transformer required (not included)
- C ETL listed and approved
- FCC certified

LED - LIGHTING MODULE

- PL6605BZ LED Module
- 150 Lumens ,2Watts, .217VA, .76 PF
- 2700K

DIMENSIONS

- 1"W x 21"H x 6"D



Intertek



HI-PL2100WB



PL6605BZ

Integrated LED Contemporary Path

ILED-PL1500BK/BZ

MATERIAL / FEATURES


- Integrated LED adjustable lighting fixture
 - Multiple applications include path lighting, area lighting, flood lighting, sconce lighting
- Heat sink for maximum heat dissipation and life span
- Thermal frosted lens to optimize event distribution of light
- Adjustable LED head rotates 270 degrees
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- Weather resistant powder coat finish - aluminum
 - (BK) Black - ILED-PL1500BK
 - (BZ) Bronze - ILED-PL1500BZ
- Includes two AC-102 silicone filled wire connectors
- Post: 1" x 1" x 22" H
- Shade: 5" x 5" x .75"
- (GS3) ABS ground stake
- Fixture - 10 year warranty

ELECTRICAL

- 12 Volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- Low voltage transformer required (not included)
- C ETL listed and approved
- FCC certified

LED - LIGHTING MODULE

- LED module is encapsulated behind thermal plastic frosted lens
- COB chipset technology
- Heat sink for better thermal management
- 380 Lumen high output
- 140 degree beam spread
- 2700K
- 3.15W, 3.96 VA, .75 PF

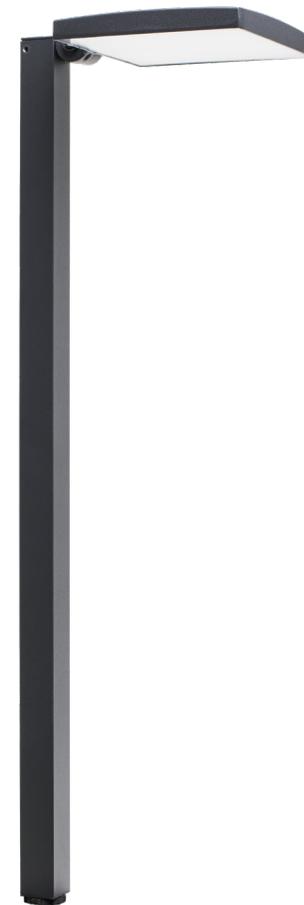

Intertek



ILED-PL1500BK/BZ

Integrated LED Contemporary Path

ILED-PL2500WB

MATERIAL / FEATURES

- Integrated LED adjustable lighting fixture
 - Multiple applications include path lighting, area lighting, flood lighting, sconce lighting
- Heat sink for maximum heat dissipation and life span
- Thermal frosted lens to optimize event distribution of light
- Adjustable LED head rotates 270 degrees
- EPDM rubber bug plug, prevents moisture/bugs from entering fixture
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- Includes two AC-102 silicone filled wire connectors
- Post: 1" x 1" x 22" H
- Shade: 5" x 5" x .75"
- (GS3) ABS ground stake
- Fixture - 10 year warranty

ELECTRICAL

- 12 Volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- Low voltage transformer required (not included)
- C ETL listed and approved
- FCC certified

LED - LIGHTING MODULE

- LED module is encapsulated behind thermal plastic frosted lens
- COB chipset technology
- Heat sink for better thermal management
- 380 Lumen high output
- 140 degree beam spread
- 2700K
- 3.15W, 3.96 VA, .75 PF



Intertek



ILED-PL2500WB